JARRETT REDBACK

** NEW RELEASE ** NEW RELEASE ** NEW RELEASE ** NEW RELEASE ** NEW RELEASE ** NEW RELEASE ** NE

Specifications	Models						
	RB 4-40	RB 5-40	RB 5-75	RB 6-75	RB 6-100	RB 7-100	RB 7-130
Body Plate thickness mm	5	5	5	6	6	6	6
Cutting width mm	1200	1500	1500	1800	1800	2100	2100
Gearbox hp (kw)	40 (30)	40 (30)	75 (56)	75 (56)	100 (75)	100 (75)	130 (97)
Drive Shaft Series	S4	S4	S6	S6	S6	S6	S6
Blue' Clutch Diameter mm	150	150	200	200	200	200	200
Tip Speed ft/min (m/s)	12,900 (65)	16,400 (85)	16,400 (85)	19,600 (100)	19,600 (100)	17,300 (88)	17,300 (88)
Linkage Category	I	I	I / II	I / II	II	II	II
Mounting Offset	C / L / R	C / L / R	C / L / R	C / L / R	C (O Kit L/R)	C (O Kit L/R)	C (O Kit L/R)
Galvanised body	Y	Y	Y	Y	Y	Y	Y
Contour-Control top link slide	Y	Y	Y	Y	Y	Y	Y
Adjustable Skids - 200 x 6mm	Y	Y	Y	Y	-	-	-
Adjustable Skids - 250 x 6mm	-	-	-	-	Y	Y	Y
Cutting Height mm	25-100	25-100	25-100	25-100	25-100	25-100	25-100
Front chain apron	Y	Y	Y	Y	Y	Y	Y
Rear rubber apron	Y	Y	Y	Y	Y	Y	Y
Rear chain apron	O	O	O	O	O	O	O
Solid rubber single height wheel	O	O	O	O	-	-	-
Solid rubber dual height wheels	-	-	-	O	O	O	O
Total Weight kg	280	340	395	500	520	660	680
Total Length mm	1680	1980	1980	2280	2270	2580	2580
Total Width mm	1350	1650	1650	1950	1950	2200	2200

KEY: C (Centre) L (Left) R (Right) Y (Yes, standard) - (Not Available) O (Optional Extra) Specifications may change without notice

Features	
One piece body sheet, clean top	No collection points for grass and debris. Simple cleaning
3-degree, side slope body	Adds to the ease of keeping the body free of debris and water lying on the body
Full length shoulder gussets	Adds strength to the side of the body to withstand the side forces placed on the slasher when turning
Hot dip galvanized body	Galvanizing* keeps your slasher body in good order for many years of service
Strong headstock and solid backstays	Allows the slasher to be reversed into dense debris without rearing up toward the tractor
Central and Offset mounting	Allows the slasher to be set in either Central, Left or Right offset
Double leg headstock (5-75 and above)	Lower link pins are held firm at each end reducing the strain on the slasher pins when the tractor is turning
Contour Control Top Link Slide	Allows the slasher to better follow the contour of the land for a more even cut
8mm headstock mounting gusset	Hidden inside the body design and combined with the 6mm front and rear body panels ensures a rigid and strong fixing point for the headstock and backstays
Bolt-on Chain guards	Easy to replace links when damaged, bolted on giving added strength to the leading edges
Skids reversible	Reversible and a slow 200mm radius front and rear leading edge keeps the skid from digging to help the slasher ride over irregularities on the ground
Skid adjustment plates	Adjusting plates give the skids 4 positive-lock height positions so you don't have to rely on just friction or aligning bolts and holes

* Galvanizing may display a bright sheen through to a dull or matt grey finish. The colour, luster or texture does not effect the coating.

Jarrett T: 02 9651 2166 F: 02 9651 3069 E: support@jarrett.net.au

NEW REDBACK SERIES



New JARRETT *REDBACK* Slashers – crawls all over the opposition !





by JARRETT

NEW

JARRETT REDBACK slashers

* ** NEW RELEASE ** NEW RELEASE ** NEW RELEASE ** NEW RELEASE ** NEW RELEASE ** NEW RELEASE ** NEW RELEASE ** NEW RELEASE ** NEW RELEASE ** NE




Contour control top link slide for a better cut and a transport lock position for safer travelling




Total-Clean top deck design means no debris collection points



One piece body sheet with a 3 degree slope helps material dislodge for easy cleaning

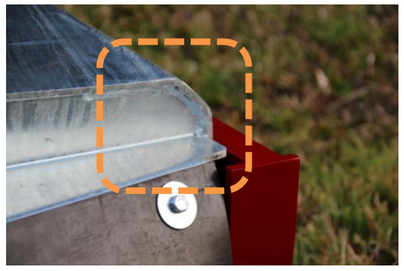


Folded body shoulders provide added strength and a smooth finish along its length

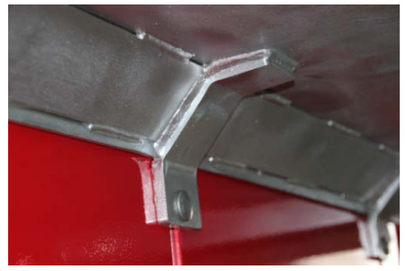

Full length body shoulder gussets add further strength to the folded shoulders of the body sheet



Superior centre body strength from full length angles bracing and 8mm Gearbox Plate to create a rigid 'H' structure

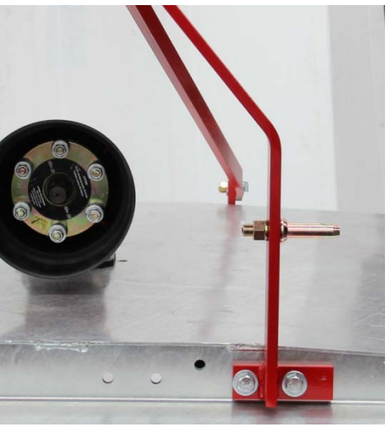

Single leg Cat I headstock with Cat I lifting pins (45Hp GB) Models RB 4-40 and RB 5-40



Double leg Cat I headstock with Cat I/II lifting pins (75Hp GB) Models RB 5-75 and RB 6-75



Double leg Cat II headstock with Cat II lifting pins (100Hp GB) Models RB 6 -100 and RB 7-100






The body, headstock and solid backstays create a triangle (one of the strongest engineering structures) to provide strength and rigidity (especially useful when reversing into dense undergrowth)



Bolt-on fabricated front chain provides a stronger guard and allows easy link replacement if damaged




Central, left and right offsets allow the headstock to be mounted in three different positions for more setup options

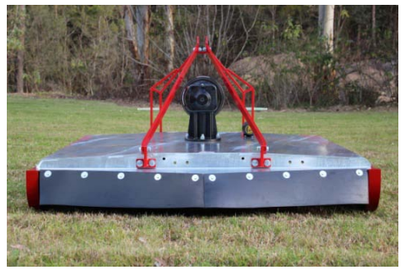

2-piece reinforced rubber guarding as standard issue or a bolt on rear chain (optional extra)



8mm skid height plates lock the skids into four height positions while adding support the skids

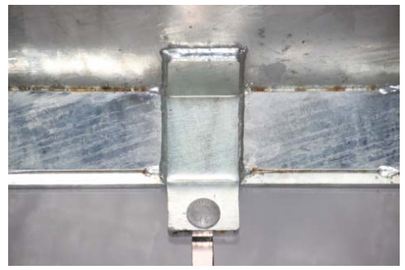

12mm body skid legs are folded and supported by the full-length body shoulder gusset



8mm gusset plates, front and rear add extra support to the 6mm formed plate aprons

Jarrett Implements Pty Ltd. 244 New Line Road Dural 2158. T: 02 9651 2166 E: support@jarrett.net.au

Jarrett Implements Pty Ltd. 244 New Line Road Dural 2158. T: 02 9651 2166 E: support@jarrett.net.au